

TRUCK CRANE AK36

WWW.TOTALLIFTING.COM



With a payload of up to 4t, the Böcker AK36/4000 boasts a range of features suiting it to a diversity of projects. This highly efficient crane offers unrivalled performance and versatility. The Böcker AK36/4000 has a maximum jib length of 36 metres. The sheer agility of the Böcker AK36/6000 crane makes it a key part of any project. Thanks to its compact dimensions and low body weight, this truck-mounted crane can access areas on site that may be off limits to bulkier machines. This helps to maximise productivity on site, reducing working times and increasing safety. With its new radio control, the Böcker AK36/4000 is one of the safest cranes on the market.



TRUCK CRANE AK36

WWW.TOTALLIFTING.COM

Permisson gross vechicle weight (t)	11,99
Max. payload (kg)	2,000 (optional 4,000)
Max. extension length (m)	36,0
Working height up to jib (m)	24,2
Jib extendable (m)	6.3 / 10.3 / 14.3
Jib payload (kg)	2.000 / 1.000 / 700
Boom angle (degrees)	85
Jib angle (degrees)	160
Pivoting range (degrees)	+/- 310
Hook Speed (m/min)	45 (55)
Range for crane operation at 250 kg (m)	30,0
Range for crane operation at 500kg (m)	24,0
Range for crane operation at 1t (m)	16,0
Range for crane operation at 2 t (m)	8,0
Range for crane operation at 3 t (m)	4,0
Range for crane operation at 6 t (m)	-
Range for crane operation at 12 t (m)	-
Range for platform operation with rotating basket (m)	23,5 at 250kg 26,0 at 100kg
Range for platform operation with non-rotating basket (m)	24,5 at 250kg 26,8 at 100kg
Working height with rotating basket max. (m)	32,7
Working height with non-rotating basket max. (m)	34,0




TRUCK CRANE AK36


WWW.TOTALLIFTING.COM

Working range crane operation



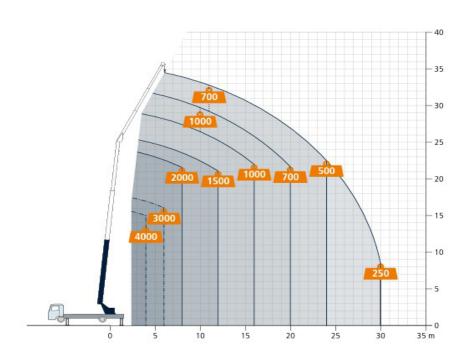

Working range platform operation

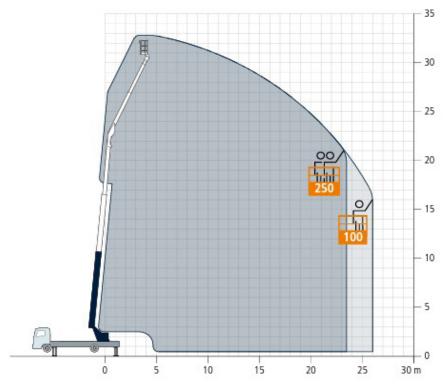


All weights in kg Measurements can fluctuate slightly




TRUCK CRANE AK36

WWW.TOTALLIFTING.COM

Dimensions

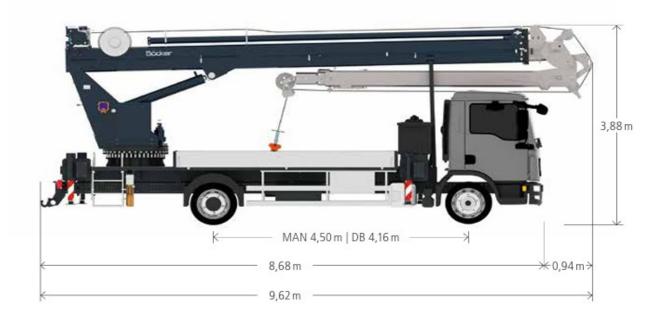

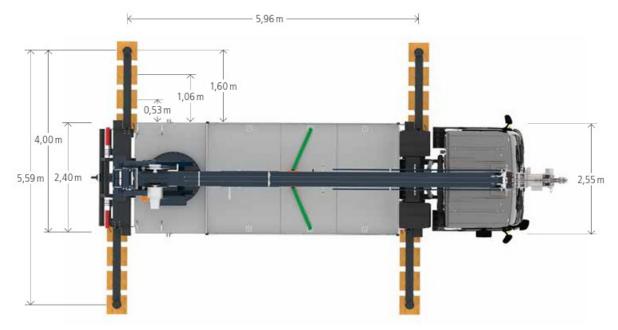

Measurements can fluctuate slighly.